

Nalgene™ 980 Clear Braided PVC Tubing for Pressure Applications




- ▶ Hardness Shore A 65
- ▶ Can be used from -21 °C to +82 °C
- ▶ Pressure resistant
- ▶ Not recommended for vacuum applications
- ▶ Suitable for food contact

Cat. No.	inn. Ø (mm)	out. Ø (mm)	Thickness (mm)	Max. pressure (to 25 °C) (bar)	Lenght (m)	€
030085	4.763	9.525	2.381	19	15	NC -
029805	6.35	11.11	2.38	19	15	NC -
029804	7.94	12.7	2.38	19	15	NC -
029728	9.525	14.29	2.3825	17.2	15	NC -
029953	12.7	19.05	3.175	15.9	15	NC -
029809	15.88	22.23	3.175	15.9	15	NC -
030082	19.05	25.4	3.175	6	15	NC -
030083	25.4	46.57	10.585	9.7	15	NC -

Latex and polyethylene tubing

Latex tubing

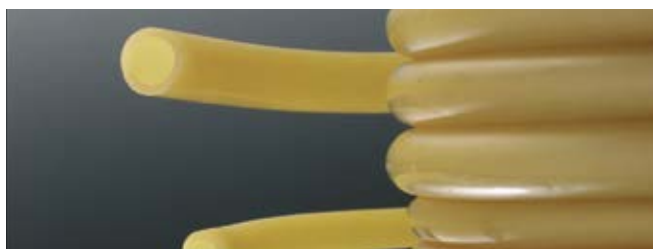

Cat. No.	Inn. ø x out. ø (mm)	Thickness (mm)	€ the roll of 10 m
091762	2 x 4	1	NC -
091763	2 x 6	2	NC -
091764	3 x 5	1	NC -
091765	3 x 6	1.5	NC -
091766	3 x 7	2	NC -
091767	4 x 6	1	NC -
091768	4 x 7	1.5	NC -
091769	4 x 8	2	NC -
091770	5 x 7	1	NC -
091771	5 x 8	1.5	NC -
091772	5 x 9	2	NC -
091773	6 x 8	1	NC -
091774	6 x 9	1.5	NC -
091775	6 x 10	2	NC -
091776	7 x 10	1.5	NC -
091777	7 x 11	2	NC -
091778	8 x 12	2	NC -
091779	9 x 13	2	NC -
091780	9 x 14	2.5	NC -
091781	10 x 14	2	NC -
091782	10 x 16	3	NC -
091783	12 x 17	2.5	NC -

Polyethylene tubing



Cat. No.	Inn. ø x out. ø (mm)	Thickness (mm)	Roll of (m)	€ the roll
091785	1 x 1.8	0.4	100	NC -
091786	1.5 x 3.5	1	100	NC -
091787	2 x 2.8	0.4	100	NC -
091788	2 x 4	1	100	NC -
091789	3 x 4	0.5	100	NC -
091790	3 x 5	1	100	NC -
091791	4 x 5	0.5	100	NC -
091792	4 x 6	1	100	NC -
091793	5 x 7	1	100	NC -
091794	6 x 8	1	100	NC -
091795	6 x 9	1.5	100	NC -
091796	7 x 9	1	100	NC -
091797B	7 x 10	1.5	50	NC -
091798	8 x 10	1	100	NC -
091799B	8 x 11	1.5	50	NC -
091800B	9 x 11	1	50	NC -
091801B	9 x 13	2	50	NC -
091802B	10 x 12	1	50	NC -
091803B	10 x 13	1.5	50	NC -
091804B	10 x 14	2	50	NC -
091805B	12 x 14	1	50	NC -
091806B	12 x 15	1.5	50	NC -
091807B	12 x 16	2	50	NC -