


## PE rapid connection connector



| Cat. No. | Nominal Outer ø (mm) | Maxi/mini outer ø (mm) | Inner ø (mm) | Units/box | €/box |
|----------|----------------------|------------------------|--------------|-----------|-------|
| 391219   | 4/5/6                | 3.5/6.0                | 1.6          | 100       | NC -  |
| 391220   | 6/7/8                | 5.3/7.6                | 2.7          | 100       | NC -  |
| 391221   | 8/9/10               | 7.2/9.7                | 3.6          | 100       | NC -  |
| 391222   | 10/11/12             | 9.3/12.2               | 5.5          | 100       | NC -  |
| 391223   | 12/13/14             | 11.0/14.4              | 7.3          | 100       | NC -  |
| 391224   | 14/15/16             | 13.2/16.0              | 8.8          | 100       | NC -  |

## Pinces pour tuyaux KECK™ Tubing clamps

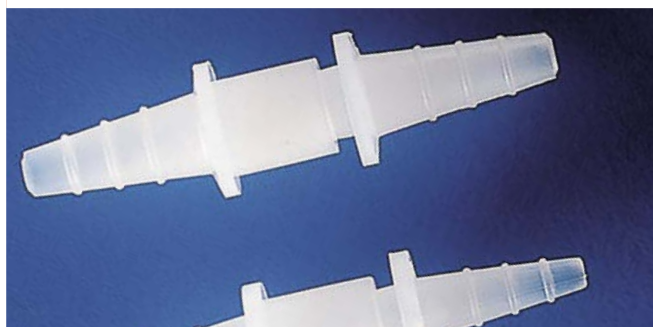

- Precise control of fluid flow using a single finger
- Made of thermoplastic polyester (PBT)
- Temperature resistant up to +200 °C
- Autoclavable

| Cat. No. | Diameter (mm) | Colours | €/10 units |
|----------|---------------|---------|------------|
| 091956   | 4,5           | Red     | NC -       |
| 091957   | 6             | Yellow  | NC -       |
| 091958B* | 10            | Bleu    | NC -       |
| 091959   | 14            | Red     | NC -       |

\* packaged in 100 units

## Pince clamp pour tuyaux de laboratoire Nalgene™ Clamp for laboratory tubing



Allows regulation of fluid flow from a fully open position, through flow restriction, to a fully closed position.

- Ideal for use with laboratory tubing
- Autoclavable
- For 1/4 to 7/16 (inch) outer diameter tubing

| Cat. No. | Description  | €/12 units |
|----------|--------------|------------|
| 029733   | Tubing clamp | NC -       |

**Thermo** SCIENTIFIC | NALGENE

## PTFE tape




- PTFE
- To protect the threads and remedy leaks
- Colour white
- L x W : 12 mm x 12 m

| Cat. No. | Description   | €/10 units |
|----------|---------------|------------|
| 391507B  | 12 meter tape | NC -       |

## Polypropylene connectors

Autoclavable Polypropylene Tubing Fittings, Straight, T or Y Shape, Tapered end models allow for greater tolerance of variations in the internal diameter of the tubing,

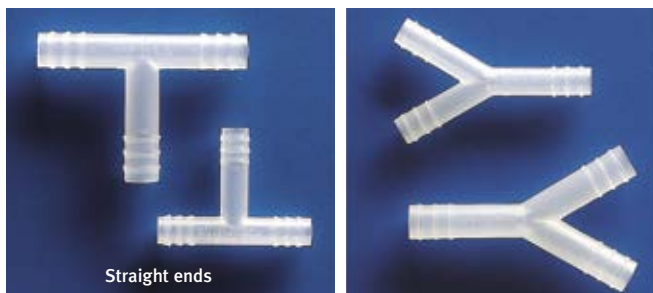

Straight ends



Tapered ends

### T-shape connector straight ends

| Cat. No. | Nominal outer diameter (mm) | For tubing with inner diameter of (mm) | €    |
|----------|-----------------------------|--|------|
| 391164   | 4                           | 3.3 / 3.6                              | NC - |
| 391165   | 6                           | 4.5 / 5.4                              | NC - |
| 391166   | 8                           | 6.9 / 7.6                              | NC - |
| 391167   | 10                          | 8.7 / 9.5                              | NC - |
| 391168   | 12                          | 10.7 / 11.5                            | NC - |
| 391169   | 14                          | 12.7 / 13.7                            | NC - |
| 391170   | 16                          | 14.7 / 15.6                            | NC - |

### Y-shape connector straight ends

| Cat. No. | Suitable for tubes with inner ø (mm) | €    |
|----------|--------------------------------------|------|
| 391171   | 3.2 / 4                              | NC - |
| 391172   | 4.7 / 5.7                            | NC - |
| 391173   | 6.6 / 7.6                            | NC - |
| 391174   | 8.9 / 9.9                            | NC - |
| 391175   | 10.5 / 11.6                          | NC - |
| 391176   | 12.8 / 13.7                          | NC - |
| 391177   | 14.7 / 15.7                          | NC - |