




4Titude Aluminium film



- Applications : PCR and storage
- In aluminium
- Operating temperature : -40 °C to 120 °C
- Dimensions : 130 x 80 mm
- With two tabs
- Drillable
- Opaque

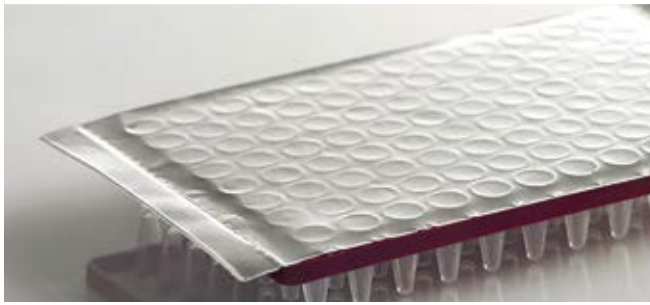

Cat.No.	Description	Units/ carton	€ Excl. VAT/ carton
016125F	4Titude Aluminium film	100	NC -



4titude Aluminium film with high solvent resistance




- Applications : PCR and storage
- In aluminium
- Operating temperature : -20 °C to 80 °C
- Dimensions : 122 x 80 mm
- With two tabs
- Excellent chemical resistance (including DMSO)



Cat.No.	Description	Units/ carton	€ Excl. VAT/ carton
044766	Aluminium film with high solvent resistance	100	NC -

Aluminium film for all plates



High performance universal aluminium adhesive film for all standard microplates, PCR plates and storage plates.

- Very low evaporation
- Drillable with a tip or pipette
- 120 x 80 mm (131 x 81.3 mm with tab)
- Temperature range -30 °C to +150 °C



Cat. No.	Description	Units/ carton	€ Excl. VAT/ carton
106570B	Aluminium adhesive film 131 x 81.3 mm	100	NC -

Nunc aluminium film





- Aluminium adhesive films
- Non-sterile
- Drillable



Cat.No.	Description	Température d'utilisation	Units/ carton	€ Excl. VAT/ carton
056320	Adhesive Film for 96-well plate	-80 °C to +150 °C	100	NC -
056321	Adhesive Film for 384-well plate	-80 °C to +150 °C	100	NC -
056112	Universal adhesive film	-80 °C to +120 °C	100	NC -

ABgene® Adhesive films for PCR plates

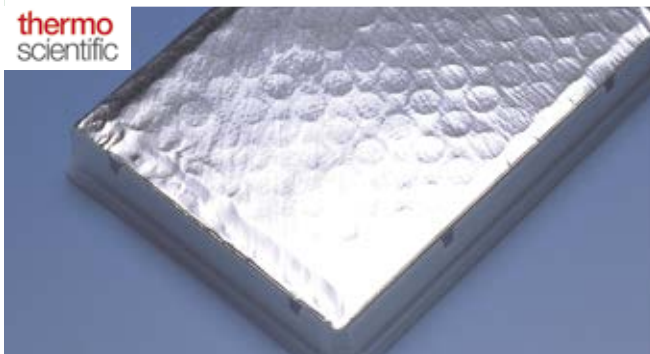

- Clear plastic with strong adhesion: peelable by hand
- Aluminium: peelable or pierceable and non-cutting
- High quality performance minimising any risk of evaporation (especially for low volume PCR)
- Edge tabs for easy removal
- Températures d'utilisation : -20 °C to +120 °C for plastic, and -40 °C to +120 °C for aluminium

Cat. No.	Description	Units/ carton	€ Excl. VAT/ carton
016028	Transparent PCR film with high adhesion	100	NC -
016125	PCR aluminium film 130 x 80 mm	100	NC -
016925	Film Applicator	1	NC -

SecureSeal aluminium film for PCR plate



- Operating temperature : -80 °C to +120 °C
- Can be pierced with a pipette tip



Cat. No.	Description	Units/ carton	€ Excl. VAT/ carton
039367	Non-sterile aluminium Film	100	NC -