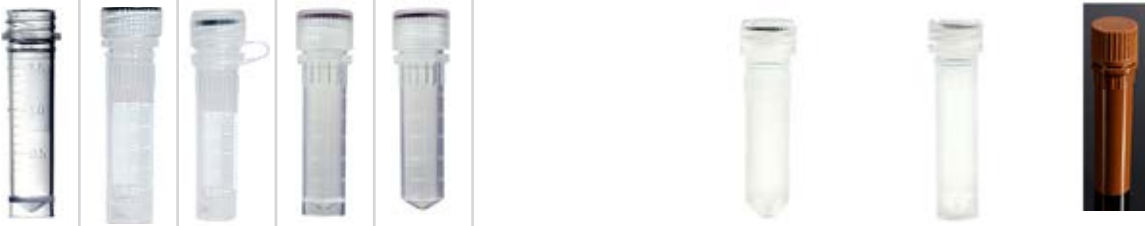



# SCREW CAP MICROTUBES

## Screw cap microtubes with cap (continued)

												
Volume (ml)	2											
Diameter (mm)	10.4	10.5	10.5	-	13	-	-	11	11	11	11	9.6
Height (mm)	44.5	45.5	46.5	-	47	-	-	45.2	45.2	45.2	45.2	47.5
Material	Polypropylene											
Sterile	Yes	Yes	Yes	No	Yes	No	Yes	No	Yes	No	Yes	Yes
Cap Type	Cap With screw and seal		Screw cap with seal with clip	Screw cap with seal; pierceable				Screw cap with seal				Vacuum cap
Autoclavable	Yes	No	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Max centrifugal speed (g)	20000			17000				-	-	-	-	-
Skirt	Yes	Yes	Yes	Yes	Yes	No	No	No	No	Yes	Yes	Yes
Graduation	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No
Marking area	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No
Colour	Excellent transparency			Translucent								Opaque
Operating temperature	-196 °C to +121 °C	-196 °C to +121 °C	-196 °C to +121 °C	-196 °C to +121 °C	-196 °C to +121 °C	-196 °C to +121 °C	-196 °C to +121 °C	-80 °C to +95 °C	-80 °C to +121 °C	-80 °C to +121 °C	-80 °C to +121 °C	-86 °C to +121 °C
Specifications	Free of DNases, RNases, DNA, PCR inhibitors and endotoxins	Free of DNase, RNase and endotoxin	Free of DNase, RNase and endotoxin	-	Free of DNase, RNase and endotoxins	-	Free of DNase, RNase and endotoxins	-	-	-	-	Free of DNases, RNases, human DNA and endotoxins
Units/box	Bag with 250 microtubes	20 bags with 50 microtubes		Bag with 500 microtubes	10 bags with 50 microtubes	Bag with 500 microtubes	10 bags with 50 microtubes	Bag with 500 microtubes	Bag with 500 microtubes	Bag with 500 microtubes	Bag with 500 microtubes	Bag with 500 microtubes
Cat. No. natural	-	062966	062967	104433	104438	104434	104439	077788	077754	077789	038554	-
Cat. No. White cap	048042A	-	-	-	-	-	-	-	-	-	-	-
Cat. No. Amber cap	-	-	-	-	-	-	-	-	-	-	-	010220
€ Excl. VAT/carton	NC -	NC -	NC -	NC -	NC -	NC -	NC -	NC -	NC -	NC -	NC -	NC -

## Screw cap microtubes without cap

									
Volume (ml)	0.5			1.5			2		
Diameter (mm)	11	11	11	11	11	11	11	10.4	9.6
Height (mm)	45.2	45.2	45.2	45.2	45.2	45.2	45.2	43.4	47.5
Material	Polypropylene								
Sterile	No								
Autoclavable	-	-	-	-	-	-	-	Yes	Yes
Max centrifugal speed (g)	-	-	-	-	-	-	-	20000	23000
Skirt	No	Yes	No	Yes	No	Yes	No	No	Yes
Graduation	No	No	No	No	No	No	No	Yes	No
Marking area	Yes								
Colour	Translucent	Translucent	Translucent	Translucent	Translucent	Translucent	Translucent	Translucent	Opaque
Operating temperature	-80 °C to +95 °C	-80 °C to +95 °C	-80 °C to +95 °C	-80 °C to +95 °C	-80 °C to +95 °C	-80 °C to +95 °C	-80 °C to +95 °C	-196 °C to +121 °C	-86 °C to +121 °C
Specifications	-	-	-	-	-	-	-	Free of DNases, RNases, DNA, PCR inhibitors and endotoxins	-
Units/box	Bag with 500 microtubes	Bag with 500 microtubes	Bag with 500 microtubes	Bag with 500 microtubes	Bag with 500 microtubes	Bag with 500 microtubes	Bag with 500 microtubes	Bag with 5000 microtubes	Bag with 500 microtubes
Cat. No. single tube natural	077241	077785	077242	077786	077243	077536	048035	-	-
Cat. No. amber tube only	-	-	-	-	-	-	-	-	010218
€ Excl. VAT/box	NC -	NC -	NC -	NC -	NC -	NC -	NC -	NC -	NC -