

## Pyrex® Screw Cap with 2 ports



- For transferring liquids using a peristaltic pump
- Made of polypropylene
- GL45 thread
- Suitable for use with soft elastic tubing that has an inner diameter of 6-9mm
- Bottle contents can be kept sterile with an optional venting connector with a 0.2µm syringe filter
- Autoclavable at 140°C

Cat. No.	Description	Units/box	€/box
002024	Twin hose connector screwcap with GL45 screwthread	2	NC -
002035	0.2µm filter with hose connector adapter	2	NC -

## DURAN® Multiport Connector Cap GL45 and GL 25, Stainless Steel




- GL45 and GL25 caps, red PBT
- Stainless steel barbed tubing (316L) Surgical grade
- Use up to 180°C
- Autoclavable at 121°C for 15 minutes
- For sterile transfer or sampling of liquids between containers
- Tank caps for feeding laboratory instruments
- Set of ports for shaking and culture flasks
- Trace Code

### Complete transfer cap

Cat. No.	Thread	Number of tubing	Tubing diameter (mm)	€
084477	GL 25	2	3.2	NC -
084478	GL 25	3	3.2	NC -
084479	GL 25	4	3.2	NC -
096363	GL45	2	3.2	NC -
096364	GL45	3	3.2	NC -
096365	GL45	4	3.2	NC -
096366	GL45	5	3.2	NC -
084475	GL 45	3	8	NC -

### Replacement units for GL45

Cat. No.	Description	Units/box	€/box
084476	Silicone seal inner x outer Ø. = 40.5 x 27.5 mm ; thickness 3 mm	10	NC -
090367	Cap GL45 in red PBT, central aperture 34 mm	10	NC -

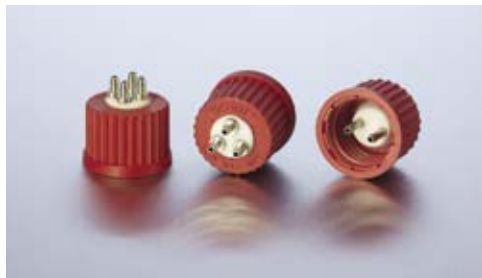

## DURAN® GL45 cap, 4-port



- Stainless steel type 316L (1.4404/S31603)
- Made with a 3D printer
- One piece electroplated for efficient cleaning and sterilisation
- Hose for tubing with and inner diameter of 6.4 mm
- The stainless steel centre and the cap are 2 separate pieces, the cap can be unscrewed without having to disconnect the hose
- Silicone gasket (platinum USP <88> catalyzed Class VI) and PP GL45 screw cap for tight closure
- Temperature resistant up to 140 °C (or 180 °C with PBT cap)
- Autoclavable at 121°C for 15 minutes
- Retrace code for complete traceability

Cat. No.	Description	€
096970	PP GL45 cap with seal and aperture and stainless steel tubing	NC -

### Accessories

Cat. No.	Description	€
084476	Replacement gasket, inner diameter 40.5 mm and outer diameter 27.5 mm, thickness 3 mm	NC -
090367	PBT GL45 screw cap with 34 mm aperture	NC -

### Applications

- Transfer of sterile liquids
- Sampling of liquids from a large volume container to bottles
- Tank cap for laboratory instruments
- Port assembly for shaking bottles and cell culture containers